


# DTK-SW8PL

## 8-Port Gigabit Ethernet PoE+ Switch

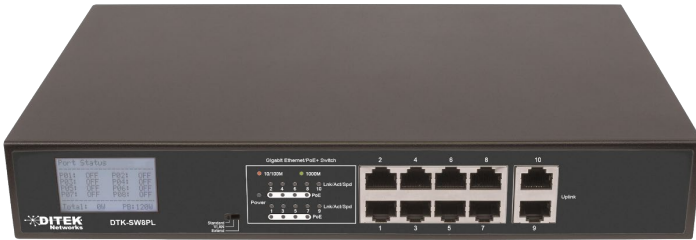

**DITEK's DTK-SW8PL** 8-Port Gigabit Ethernet PoE+ Switch with 2 RJ45 Uplinks and LCD Screen passes both data and electrical power to a number of PoE-compatible devices using existing infrastructure cabling.

### Product Features

- Provides power and data for up to 8 PoE network devices
- 10/100/1000 auto-sensing ports for automatic detection of optimal network speeds
- Manual extend mode reduces network speed and extends PoE support to 250 m
- Green Ethernet power saving technology deactivates unused ports and adjusts power levels
- Power output up to 30 watts per port
- PoE power budget of 130 watts
- All RJ ports equipped with Auto-MDIX and auto-negotiation support
- Supports up to 8192 MAC address entries
- Cooling fan for ventilation
- Provides private VLAN (port isolation) functionality

### Applications

- VoIP PoE Phone
- Wireless PoE Access Point
- PoE Network Camera

### Package Contents

- 8-Port Gigabit Ethernet PoE+ Switch with 2 RJ45 Uplink Ports and LCD Screen
- Power Cable
- User Manual
- 19" Mounting Brackets

### Technical Specifications

<b>Backplane Speed:</b>	20 Gbps
<b>Switch Architecture:</b>	Store and Forward

### Power

<b>Input:</b>	100 – 240 VAC 50 – 60 Hz, 2.5 A
<b>PoE Budget:</b>	130 Watts (maximum)
<b>Power Consumption:</b>	140 Watts (maximum)

### Display

<b>Type:</b>	LCD
<b>Resolution:</b>	128 x 64 pixels
<b>Viewing Area:</b>	43 mm x 23 mm (1.69" x 0.9")

### Environmental

<b>Housing:</b>	Metal Case
<b>Dimensions:</b>	11.06"L x 7.09"W x 1.75"H (280.92mm x 180.09mm x 44.45mm)
<b>Weight:</b>	5.38lbs. (2.44kg)
<b>Operating Temperature:</b>	0-45°C (32-113°F)
<b>Operating Humidity:</b>	10-90% RH, non-condensing
<b>Storage Temperature:</b>	-10 - 70°C (14-158°F)

### Standards & Approvals

<b>Certifications:</b>	FCC Class A, CE, RoHS
<b>Standards Compliance:</b>	IEEE 802.3 (10Base-T Ethernet) IEEE 802.3ab (Twisted Pair GbE) IEEE 802.3af (PoE 802.3at Type 1) IEEE 802.3at (PoE 802.3at Type 2) IEEE 802.3az (Energy Efficient Ethernet) IEEE802.3u (100Base-TX Fast Ethernet) IEEE 802.3x (Flow Control Full Duplex)
<b>Warranty:</b>	3 Year Limited

